
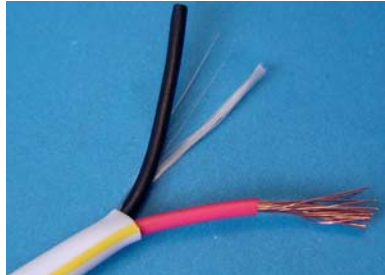


Product Specification Sheet

Catalog Number: 16-2C-P-VAN

Construction Detail	Product Illustration
 <p>Outer Jacket 16 AWG Component Ripcord</p>	
Physical Construction	Description
<p>Component 1: 16 AWG 26/30 bare copper conductor PL-PVC Insulation: .010-inch nominal thickness</p>	<p>Custom printed communications plenum rated wire for low voltage lighting control applications and installations in accordance with NEC article(s) 725 and 800.</p>
	Color Code
	<p>Black, Red</p>
	Electrical Specifications
	<p>16 AWG: DCR: 4.0 Ω per 1000 feet Mutual Capacitance: 31.3 pF per foot Voltage: 300 Volts RMS Temperature: -10°C to 60°C</p>
	Regulatory Specifications
<p>Final assembly: 2 of component 1 twisted in a 2.25-inch lay Nylon ripcord under the jacket. PL-PVC jacket: .015-inch nominal thickness Final construction: .195-inch nominal OD Product Print Legend: E190606 C(UL)US 16 AWG TYPE CMP LOW CAPACITANCE Sequential footmarks are applied in conjunction with the print legend.</p>	<p>(UL) rated CMP C(UL) rated CMP EU RoHS 2002/95/EC Compliant since 06/15/2005</p>
Specification Control	Product Information
<p>Revision Date: 04/11/2009</p> <p>Liberty Wire & Cable specifications are subject to change without notice. Contact an account representative for current product specifications. Liberty Wire & Cable continuously strives to ensure product specifications are accurate and complete. All physical specifications are nominal.</p>	<p>Jacket Colors: Natural White with a yellow stripe</p> <p>Packaging: 1000 foot spools</p>

Form Revision Date: 04/15/2004