
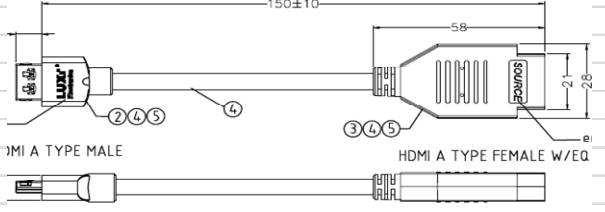






| | |
|---|---|
| Product Specification HDMI Extender, F-M pigtail | Part Number: 74-035-01 Model: EHD-111 |
| Product Image  | Product Drawing  |
| Features and Benefits <ul style="list-style-type: none"> > Virtually doubles the max usable cable length > Installers carry it in the briefcase and add it to the TV end when needed to fix unexpected problems instantly > Work with any brand passive HDMI cables > Convenient inline design, no mounting needed > Luxi's patented T-grip locking HDMI connector design on both male and female ends to ensure secure mating > Luxi's SuperSlim HDMI plug and cable fits the tightest space > No external power supply needed > HDMI 2.0 3D, HEAC, Deep Color etc. compliant > HDCP 2.0 compliant > RoHS compliant | General <p>Connector type: Input: HDMI Type A female Output: HDMI Type A male</p> <p>Signal processing: equalization, no re-clocking Where to apply the product: TV (sink) end Power supply: not needed; draws power from source Warranty: 3 years replacement</p> |
| Package <ul style="list-style-type: none"> 1-pc zip bag: 8"x2"x1/2" (21x5x1.3 cm) 1.4 oz (39 g) 5-pc bag: 9"x8"x1/2" (23x20x2 cm); 7 oz (200 g) 200-pc box: 16"x12"x12" (41x30x30 cm); 19.5 lbs (8.8 kg) | Mechanical <p>Overall male plug width: 0.73" (18.5 mm) Overall male plug height: 0.35" (9 mm) Overall male plug length: 0.59" (15 mm) Overall female enclosure width: 1.10" (28 mm) Overall female enclosure height: 0.43" (11 mm) Overall female enclosure length: 2.28" (58 mm) Overall product length: 5.9" (150 mm) Retaining force (both male/female): 15 lbs (6.5 kg) typical Contact pin gold plating: 30 u" (0.76 um) Top metal shell gold plating: 2 u" (0.05 um) Contact pin pitch: 0.039" (1.00 mm)</p> |
| Other Related Products HDMI DIY connectors and clamshells, 10 sets P/N 68-009-11 (regular); P/N 68-010-01 (ribbon) | Electrical <p>Supported formats: 3D, 1080p 60 Hz, Deep Color etc. Max data rate: 6.7 Gbps Max cable length (depends on source and sink devices): 24 AWG cable: up to 50 m (165') (1080p) 28 AWG cable: up to 36 m (120') (1080p) 30 AWG cable: up to 30 m (100') (1080p) EQ gain: 0 to 40 dB at 5 Gbps (825 MHz signal frequency) HDCP compliant: Yes; repeater pass thru Power supply: from source +5 V via HDMI cable Power consumption: 10 to 165 mA Eye patters at max cable length: Top: without Extender; bottom: with Extender</p> |
|  <p>Hand tool, P/N 68-011-01, model DIY-28T</p>  <p>HDMI raw cable spool in a box, available in 2 lengths Regular: P/N 22-001-02, 250'; P/N 22-001-03, 500' Ribbon: P/N 22-002-06, 250'; P/N 22-002-07, 500'</p>  |  |