




Simplify installations with Intelix DIGI-HD-COAX extenders. The first of its kind, the Intelix DIGI-HD-COAX transmits high-definition HDMI signals over a single coaxial cable.


Designed for demanding commercial and residential audio-visual applications, the DIGI-HD-COAX employs Intelix's industry-leading HDMI processing to ensure audio and video perform flawlessly up to 675 feet using RG6 or RG59. Plus, built-in 1x2 distribution amplifiers split video signals to two independent outputs, thereby allowing dual distribution systems and/or daisy-chaining.

Both the transmitter and receiver include two BNC to F adaptors, ensuring compatibility with different cable terminations.

Finally, HDMI meets install.

Video Bandwidth	2.97 Gb/s	Supported Resolutions	1280x720, 1920x1080
RG6 Max Distance (point-to-point or between links)	1080p: 300 feet 1080i: 675 feet 720p: 675 feet	(DVI/PC connection)	50/60 Hz
RG59 Max Distance (point-to-point or between links)	1080p: 250 feet 1080i: 675 feet 720p: 675 feet	Operating Temp Range	32 to 104 degrees F 0 to 40 degrees C
Max Links	5	Operating Humid Range	10 to 85% non-condensing
Transmitter Connectors (DIGI-HD-COAX-S)	One (1) HDMI type A connector and two (2) female BNC	Dimensions	3.625" x 3.875" x 1.000"
Receiver Connectors (DIGI-HD-COAX-R)	One (1) HDMI type A connector and two (2) female BNC	Enclosure	Metal
Supported Audio	PCM 2.0 (48 kHz)	Max Power Consumption	5 watts
Unsupported Audio	Dolby TrueHD 7.1, Dolby TrueHD 5.1, Dolby Digital 5.1 DTS-HD Master Audio 7.1, DTS-HD Master Audio 5.1, DTS 5.1, PCM 5.1, PCM 2.0 (44.1 kHz)	Power	5 VDC / 2A
		Regulatory	CE, RoHS
		Compliance	HDMI 1.3, HDCP 1.1
		Shipping Weight	2.1 lbs.
		Max HDMI Cable Length	2m or less
		Intelix Part Numbers	Transmit: DIGI-HD-COAX-S Receive: DIGI-HD-COAX-R
		Included Accessories	(1) power supply, (2) male BNC to female F connectors
		Warranty	2 years

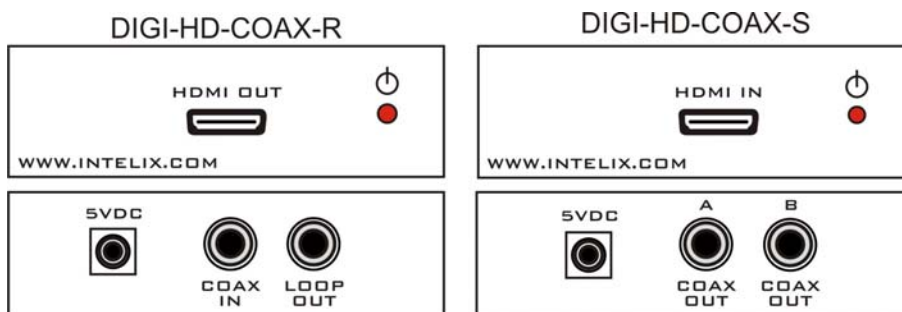

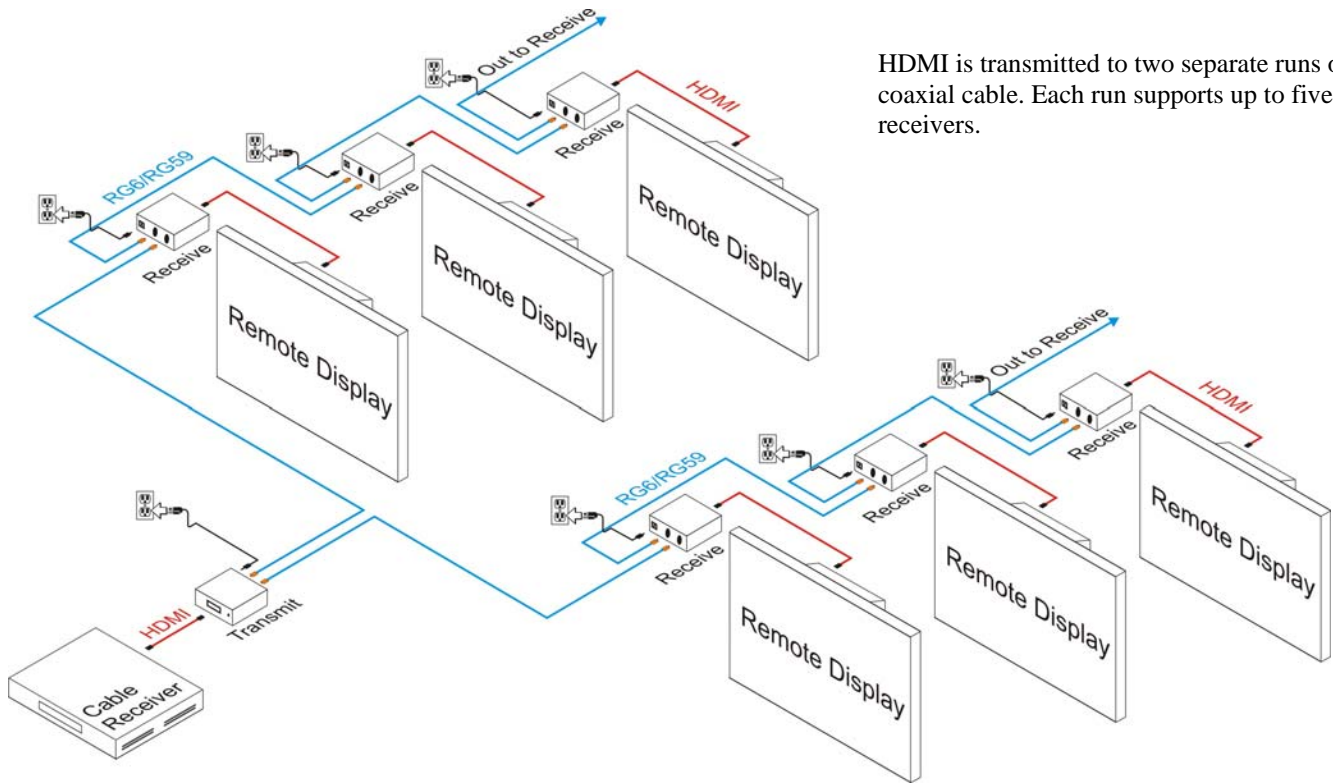

HDMI is transmitted to two separate runs of coaxial cable. Each run supports up to five receivers.