



REV	DESCRIPTION	DATE
∅	ISSUE	12/19/02
A	REVISE PIN OUT	01/07/03
B	REVISE CABLE SPEC.	02/19/03
C	REVISE P/N.&PACKING SPEC&ADD P/N.	07/17/03

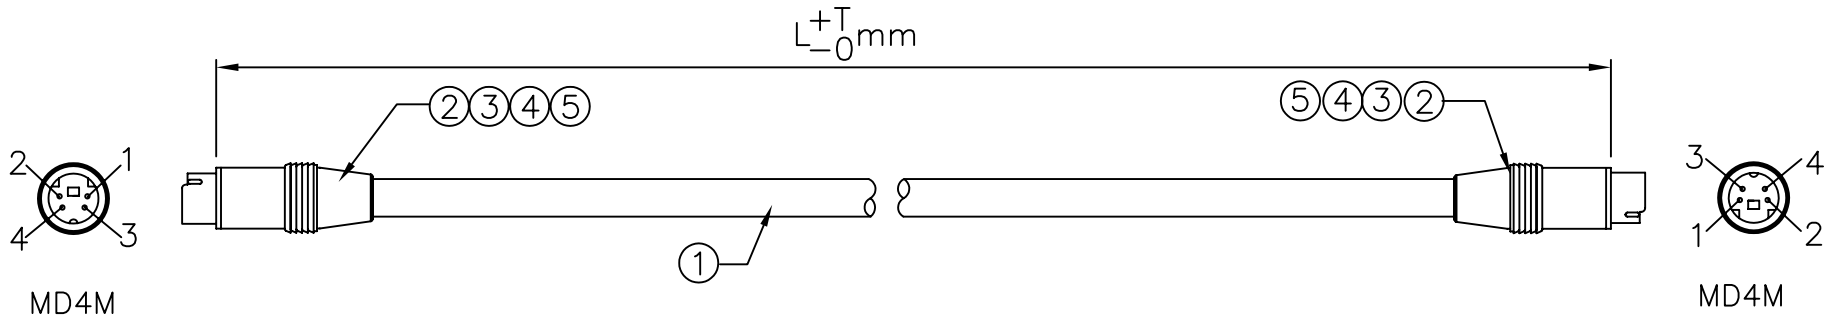

NOTE:

- CONTINUITY TESTING:DC500V/10mS  
INSULATION RESISTANCE:50MΩ(MIN.)  
CONDUCTIVE RESISTANCE:2.0Ω(MAX)(L≤3M).  
3.0Ω(MAX)(3M<L≤10M).  
6.0Ω(MAX)(10M<L≤20M).  
8.0Ω(MAX)(20M<L≤50M).
- TOOLING FOR PERMOLD OF MD4M:SM1-MD4M-KO1.

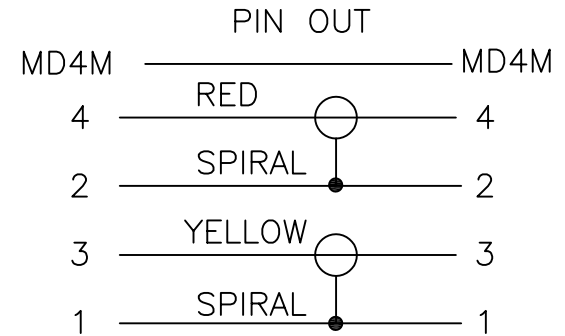

E-SVM-M-15	4572	50	E-SVM-M-100	30480	150
E-SVM-M-12	3657.6	35	E-SVM-M-75	22860	150
E-SVM-M-6	1828.8	20	E-SVM-M-50	15240	150
E-SVM-M-3	914.4	20	E-SVM-M-35	10668	100
E-SVM-M-1.5	457.2	10	E-SVM-M-25	7620	75
P/N.	L(mm)	T(mm)	P/N.	L(mm)	T(mm)

<i>Liberty Wire and Cable</i>			
	UNIT: mm	TITLE	
SCALE	NONE	MD4M/MD4M CABLE ASS'Y	
UNLESS OTHERWISE SPECIFIED TOLERANCES: x ±x xx ±xx xxx ±xxx ANGLE ±		P/N: E-SVM-M-XX <span style="border: 1px solid black; padding: 2px;">C</span>	DR. DK
REV. C	SHEET 1/1	DWG.NO:	CH. RP
			AP. RP