



## LB-KP8E/LB-KP16E

### Link Bridge™ 8-/16-Button Wall Plate Ethernet Controller

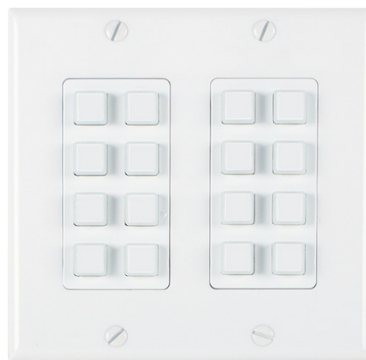

#### FEATURES

- 1-gang wall plate Ethernet controller with 8 buttons (LB-KP8E)
- 2-gang wall plate Ethernet controller with 16 buttons (LB-KP16E)
- Extra virtual buttons are available via WebGUI configuration
- Comes with relays to control peripheral device on/off
- Available with PoE function or DC power supply selection
- Supports Telnet or WebGUI control
- Supports scheduling control and settings
- Adjustable LED dim light in keypad buttons

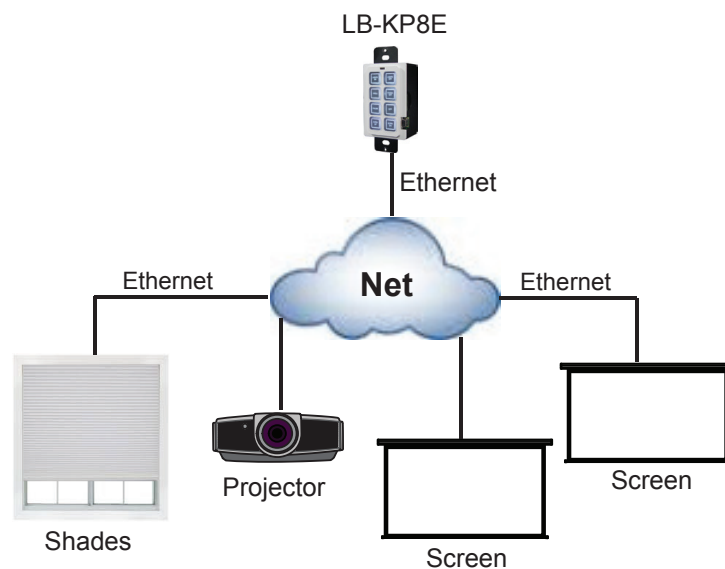

DOING MORE WITH ONE CABLE

## I/O CONNECTORS

Keypad	8 or 16 buttons
I/O	Ethernet (1), RJ-45 Relay (1), Terminal Block

## PHYSICAL




Dimensions (W x H x D)	3.62" x 4.07" x 1.50" (LB-KP16E) 1.81" x 4.07" x 1.50" (LB-KP8E)
Operating Temperature	0°C to +40°C
Storage Temperature	-20°C to +60°C
Power Supply	5V/2.6A

## ORDERING INFORMATION

LB-KP16E	Link Bridge 16-Button Wall Plate Ethernet Controller
LB-KP8E	Link Bridge 8-Button Wall Plate Ethernet Controller

Add -ICP for ICP version

## PANEL DRAWINGS

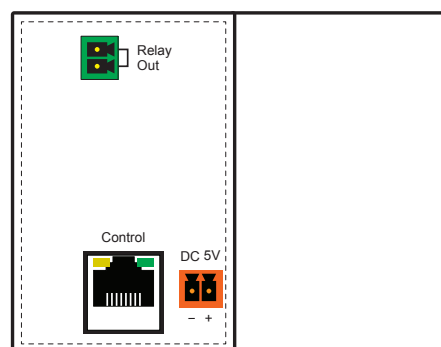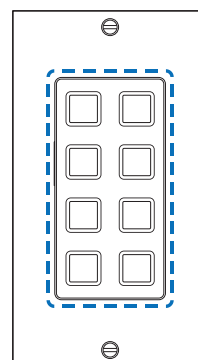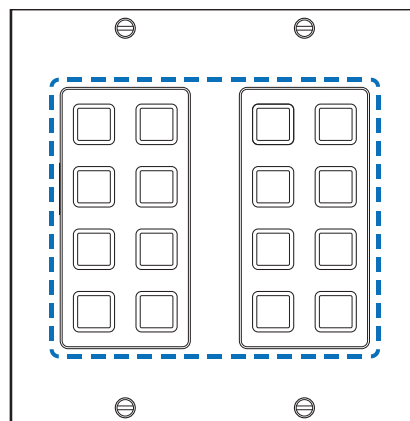

DOING MORE WITH ONE CABLE



**HDCP**

**4K**  
ULTRA HD