

LINK BRIDGE™



LBC-H/V-T-SCL

HDMI 1 Audio 1 LAN 2-Way IR/RS232 2-Way PoH 2-Way

Link Bridge™ HDMI/VGA HDBaseT Scaling Tx System



LBC-SCL HDBaseT Scaling Transmitter (Front)

INPUT SIGNAL

Signal Format	HDMI/ VGA/ Audio
Input Ports	HDMI, HD-15 VGA, 3.5mm (L/R)
Graphic Resolution	Up to 1080p & 1920 x 1200, 60 Hz
Frequency Bandwidth	10.2Gbps

FEATURES

- Supports Input/ Output Resolution up to 1080p & 1920 x 1200 @ 60Hz
- High performance video scaler with OSD Menu Control
- Supports HDMI w/ embedded analog audio
- Supports VGA/HDMI input switching via front panel button or RS232 control
- Provides output picture adjustment on contrast, brightness, hue, saturation, sharpness, RGB level, and scan size
- Auto-EDID support, Automatically detect the factory setting of the connected display
- Supports 5 play HDBaseT, Video/Audio + LAN + IR + RS232 + PoH over 100m

DATA

Network	LAN
Data Rate	100Mbps
Connector	RJ45
IR	Infrared
Data Rate	30 - 50KHz
In/ Out connectors	3.5mm stereo
Serial Control	RS232
Data Rate	Up to 57.6Kbaud
Connector	DB9 Serial

SUPPORTED RESOLUTIONS

Resolution	Vertical Refresh Rate (Hz)
640x480	60
800x600	60
1024x768	60
1360x768	60
1280x720	60
1280x800	60
1280x1024	60
1440x900	60
1400x1050	60
1680x1050	60
1600x1200	60
1920x1080	60
1920x1200	60
720x480P	60
1280x720P	60
1920x1080I	60
1920x1080P	60
720x576P	50
1280x720P	50
1920x1080I	50
1920x1080P	50

HDBT TRANSMISSION

HDBT Cable Type	CAT 5e/6 or higher
Number of Cables	1
Connector/ Distance	RJ-45/ 100m


PHYSICAL

Dimension	5.71" (W) x 7.91" (D) x 1.18" (H)
Power Consumption	+24VDC @ 2.7 Amps (Max.)
Operating Temperature	0 to +40°C
Humidity	20 to 90% RH, Non-Condensing

ORDERING INFORMATION

LBC-H/V-T-SCL, HDBaseT HDMI/VGA Scaling Transmitter, HDMI & VGA Inputs
 Add -UPS for International Universal Power Supply

DIMENSIONS

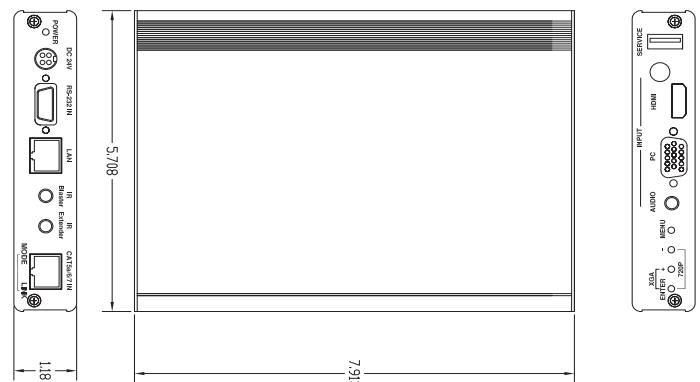

DOING MORE WITH ONE CABLE