



LBS-88H2-SCL42

Link Bridge™ 8x8 HDMI 2.0 Matrix Switcher with Output 4K2K Scaling

Application Diagram



SWITCHER

Input	Eight (8) HDMI 2.0 ports
Output	Eight (8) HDMI 2.0 ports
Control	Front Panel Buttons LAN, RJ45 RS232 (1), DB-9 IR
Service	USB, for firmware upgrade

PHYSICAL

Dimension (W x D x H)	17.32" x 1.74" x 8.93"
Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 60°C
Power Supply	12V@4A



ORDERING INFORMATION

LBS-88H2-SCL42	8x8 HDMI 2.0 Switcher with Output 4K2K Scaling
----------------	--

FEATURES

- An 8x8 HDMI 2.0 matrix switcher with HDCP 2.2 compliance
- Supports video resolutions up to 3840×2160@60Hz & 4096×2160@60Hz with 4:4:4 YUV and HDR format
- Supports pass-through of audio formats including LPCM 2.0–7.1, Dolby Digital, DTS, Dolby Digital Plus, Dolby TrueHD, Dolby Atmos and DTS-HD Master Audio
- Provide optional output 4K or 2K scaling
- Supports EDID management
- Multiple control interfaces including Front Panel Buttons, RS-232, Telnet, WebGUI and IR remote

PANEL DRAWINGS

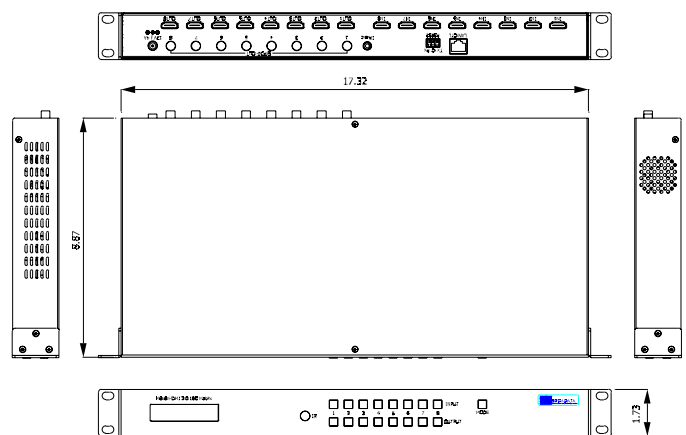

DOING MORE WITH ONE CABLE

