


QUICK GUIDE



INT-USB2-50H



INT-USB2-50C

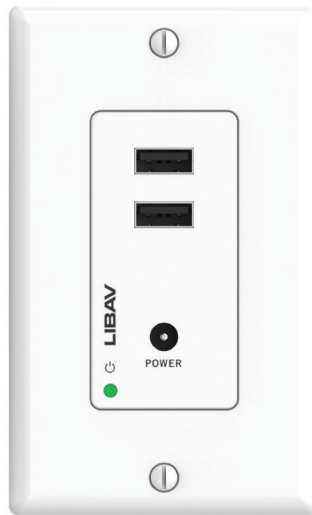

INT-USB2-50CWP



INT-USB2-50HWP

50M USB2.0 EXTENDER SET

Local & Remote Units Sold Separately



www.libav.com 800.530.8998

TECHNICAL SPECIFICATIONS

Model	INT-USB2-50C	INT-USB2-50CWP	INT-USB2-50H	INT-USB2-50HWP
Physical Parameter				
Case Material	Industrial grade Metal Chassis with metal brackets or wall plate			
Dimensions	82mm(W)x49mm(D)x20mm(H)	45mm(W)x103mm(D)x21mm(H)	82mm(W)x49mm(D)x20mm(H)	45mm(W)x103mm(D)x21mm(H)
Weight	100g	102g	100g	102g
Power Protection	Over current, over voltage, short circuit protection			
Power Output	DC 12V 1A			
Power Input	AC 100-240V 50/60Hz			
Power Consumption	2.28W			
Operating Temperature	32 F-104 F			
USB Specifications				
Supported Transfer Rates	Transfer rate up to 480 Mbps			
Power Protection	Over current, over voltage, short circuit protection			
USB Specifications	Fully compatible with USB 2.0/1.0 specifications			
LED Indicator	1 x LED: Power Status			
Ports	2 x Female USB 2.0 A		1 x Female USB 2.0 B	
Extension Distance	Up to 50m 100m CAT6 recommended			
Features				
Operating System	Windows®7 (1080p and under only), Windows 8.1, Windows 10 or higher macOS™ 10.10 or higher Google™ Chromebook™ Version 29.0.1547.70 or higher Linux			
USB Charging Protocol	Supports charging connected USB devices without host connection if external power supply is used			
USB Communication Protocol	Will pass UVC 1.1 signals and communication			

Thank you for your purchase.

For Technical Support please call our
toll-free number at 800-530-8998
or email us at supportlibav@libav.com



www.libav.com 800-530-8998