


## PMI-A9B Technical Specification

Full Speed USB Twisted Pair Extender – Host Side Module

Rev. 130422

The PMI-A9B extenders transmit low speed USB 1.0, 1.1, and 2.0 signals up to 330 feet, and full speed USB 1.0, 1.1, and 2.0 signals up to 100 meters / 330 feet over any Cat5/5e/6/6A twisted pair cabling. The PMI-A9B is installed at a host location to connect peripherals from a remote client side extender.

The PMI-A9B is plug-and-play, does not require driver software, and uses the same USB circuit as our other USB bus power devices for installation flexibility.

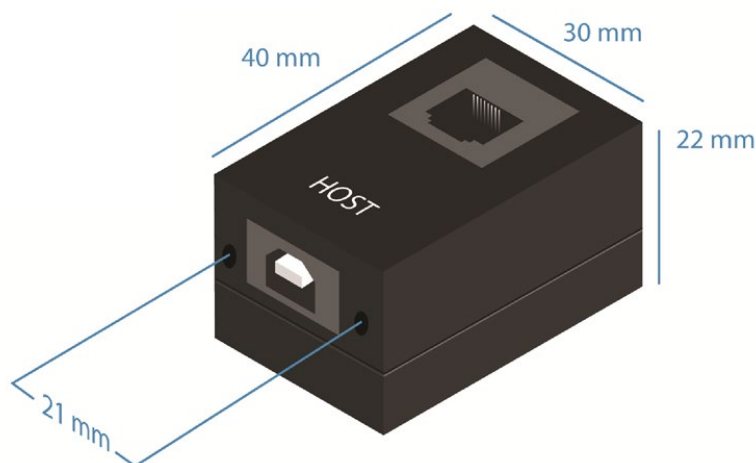

Technical Specifications	
<b>I/O Connections</b>	
USB	One (1) Female USB Type B
Twisted Pair	One (1) 8P8C port (Shielded RJ45)
<b>Supported Data and Power</b>	
Full Speed (12 mbps) Maximum Distance via Cat 5e	100 ft.
Low Speed (1.5 mbps) Maximum Distance via Cat 5e	300 ft.
RJ45 Pin Configuration	Pin 1: Data + Pin 2: Data – Pins 3, 4, 5, and 6: GND Pins 7 and 8: 5V DC
<b>Chassis and Environmental</b>	
Enclosure	Black ABS plastic
Housing Dimensions	40 mm x 30 mm x 22 mm (1.57 in. x 1.18 in. x .087 in.)
Operating Temperature (Environment)	0° to +40° C (+32° to +104° F)
Operating Humidity (Environment)	20% to 90%, Non-condensing
Storage Temperature (Environment)	-10° to +60° C (+14° to +140° F)
<b>Power, ESD, and Regulatory</b>	
Maximum Power Consumption	2.5 watts
Power	Via USB output of host device
Vbus Power	5V DC
High Power Device Extension (<500 mA draw)	30 ft.
Low Power Device Extension (<100 mA draw)	200 ft.
Self Powered Device Extension (0 mA draw)	330 ft.
ESD Protection	Contact Discharge: 2 kV Air Discharge: 4 kV IEC61000-4-2 1995
Regulatory	CE, RoHS
<b>Other</b>	
Standard Warranty	5 Years
Included Accessories	Installation Guide
Compatible Client Devices	AVO-USB-C, PMI-A9A, USB-WP-C

Distances and picture quality may be affected by cable grade, cable quality, source and destination equipment, RF and electrical interference, and cable patches. Intelix specifications are based on straight-through cabling with standard-grade Cat 5e unless noted otherwise.