



**LIBERTY**  
AV SOLUTIONS

The Next Level of Huddle Space  
and Conference Room Solutions



# PACKAGE 1

Simple small huddle space connectivity package designed for a room with 2-3 people.

**PART#: RM-PKG-1**

## PACKAGE FEATURES AND BENEFITS:

- Auto switching device with 1 HDMI and 1 VGA video with audio
- Built in CEC control
- Digital adaptor ring for all of the most popular mobile devices
- Small recessed table box for HDMI, VGA with audio, network, and power connectivity to the table
- All cables are included (lengths may be modified)






## INCLUDED IN PACKAGE 1

- Qty 1: **DL-AS21C**  
HDMI + VGA Auto-Switcher with CEC Control
- Qty 2: **E-HDVAM-M-06**  
6' Tabletop HDMI, VGA and Audio hybrid cables
- Qty 1: **M2-HDSEM-08F**  
8' Liberty Reduced Profile HDMI Patching Cables with High Retention
- Qty 1: **DL-AR1421**  
DIGITALINX HDMI Adapter Ring
- Qty 1: **TRB-2V1AD**  
Ground recessed Audio Video cable box
- Qty 1: **PC6B003BK**  
3' LAN Solutions Category 6 U/UTP pre-made patch cable
- Qty 1: **PC6B025BK**  
25' LAN Solutions Category 6 U/UTP pre-made patch cable

## POSSIBLE SUBSTITUTIONS FOR PACKAGE 1

- 1) HDMI Only Solution? Swap the DL-AS21C for DL-S41 4x1 HDMI Auto Switch
- 2) Want more HDMI & VGA connectivity? Switch the DL-AS21C for DL-AS31 3x1, or DL-AS61 6x1
- 3) Want to add Display Port connectivity? Swap DL-AS21C for DL-AS31-1H1DP1V
- 4) Add Manual Contact Closure hard buttons on Panel Crafters plate for manual Source selection on table

## OPTIONAL ADDITIONS TO THIS ROOM

- 1) Add full affordable control with Broaddata LB-ICP controller 
- 2) Wireless Access Point NWA100 or In-wall WAP NWA200 
- 3) Need a network Switch? Niveo NGSE8H 
- 4) Fiber based HDMI cable if longer run is needed out of switcher
- 5) Power products from Niveo


# PACKAGE 2

Accommodates small smart huddle space/quick meet space with single display/projector and meeting table. Includes full control. **PART#: RM-PKG-2**



## PACKAGE FEATURES AND BENEFITS:

- Single HDMI connectivity, plus allows for full room control automation with no User Interface (UI)
- Supports control of multiple displays, other controllable electronics (Biamp, Polycom, etc.) and provides an active response to any management software
- Turn any HDMI or digital video signal into a Control Automation trigger

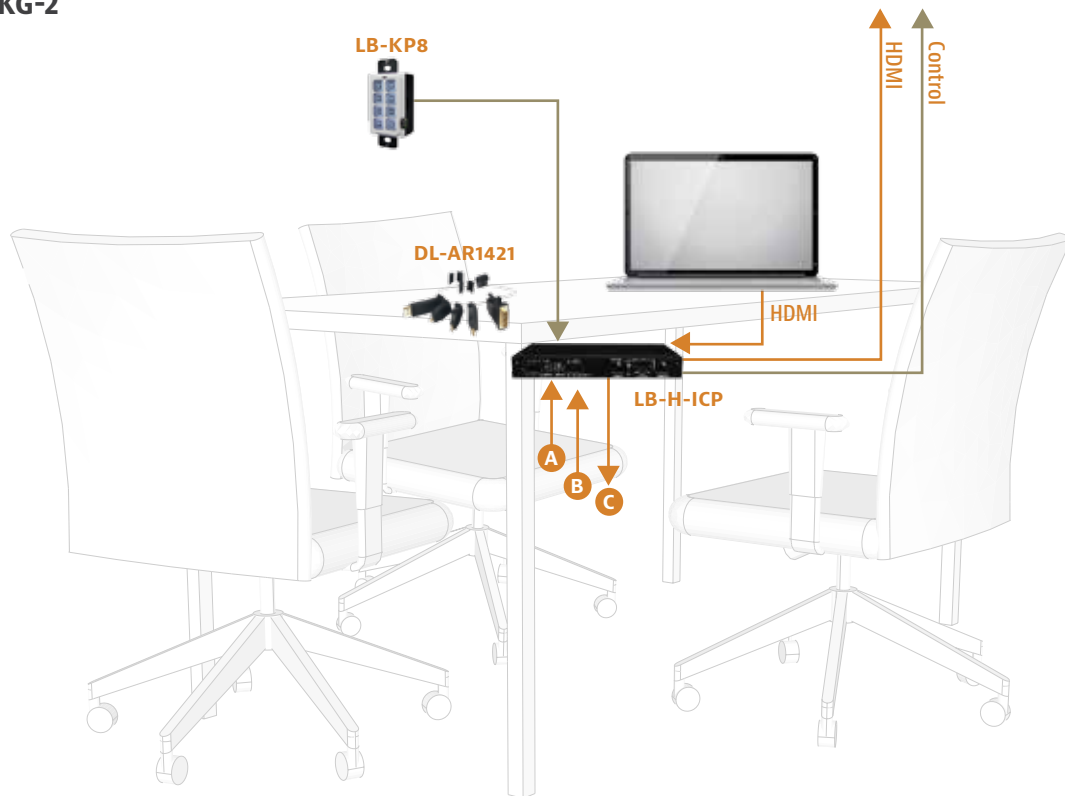

- A** Alternate Interface / Occupancy Sensor / Contact Closure
- B** Network / Control Network / Web Interface GUI / Management
- C** Additional Control Out

## INCLUDED IN PACKAGE 2

- Qty 1: **LB-H-ICP**  
Link Bridge HDMI Repeater, Inline Control Ports
- Qty 2: **DL-AR1421**  
DIGITALINX HDMI Adapter Ring
- Qty 2: **M2-HDSEM-08F**  
8' Liberty Reduced Profile HDMI Patching Cables with High Retention

## POSSIBLE SUBSTITUTIONS FOR PACKAGE 2

- 1) Want a wall plate controller integrated keypad? Add LB-KP8E
- 2) Want 4 HDMI & 1 VGA with scaling (1920x1200)? Switch the DL-S41 to DL-AS61
- 3) Want 2 HDMI, 2 VGA, 1 DisplayPort with all scaled outputs (1920x1200) Switch DL-AS61 to LBC-PSW52-HDV
- 4) Want 4 HDMI connections at table? Add Liberty part# DL-AS41

## OPTIONAL ADDITIONS TO THIS ROOM

- 1) Niveo Access-Point NWA200
- 2) Broadata LB-KP8 or LB-KP4 8 or 4 button keypad
- 3) Broadata LBC-HDBT-R-48-Lite


# PACKAGE 3

Medium size huddle space with single display where display is further away and signal extension is needed.

**PART#: RM-PKG-3**

## PACKAGE FEATURES AND BENEFITS:

- 2 HDMI input auto-switching device
- Digital adaptor ring for all of the most popular mobile devices
- Integrated automation control to power on/off the display
- Source selection can be auto switching, RS232 via 3rd party control, or manual contact closure
- HDBaseT signal extension up to 60m between switcher and remote receiver at display. 2 way/PoE
- Package includes 50' pre-terminated shielded Cat6. Other lengths may be substituted

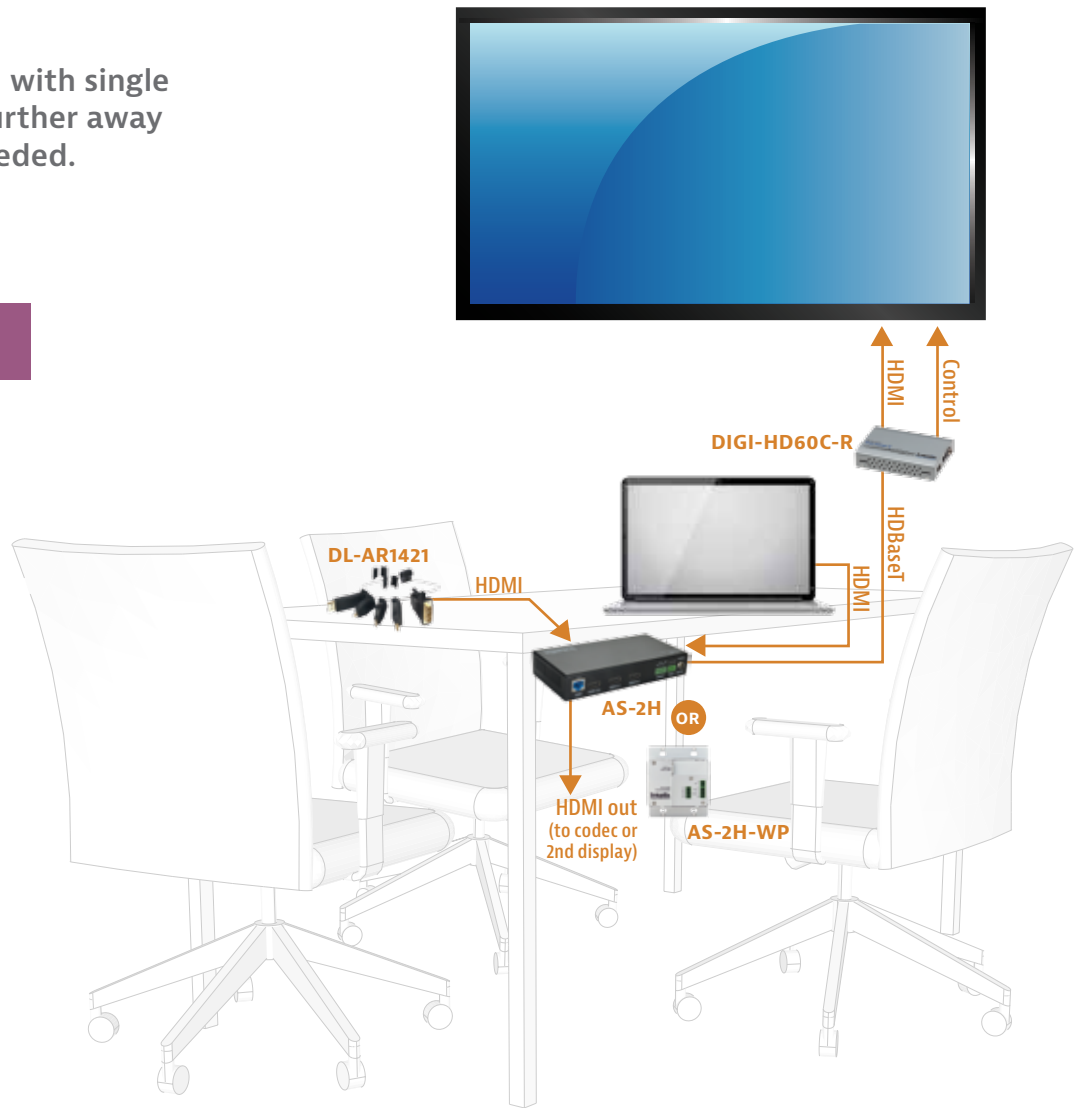

## INCLUDED IN PACKAGE 3

- Qty 1: **AS-2H**  
Dual HDMI Auto-Switcher with HDMI & HDBaseT Output
- OR • Qty 1: **AS-2H-WP**  
Dual HDMI Auto-Switching Wallplate w/ HDBaseT Output
- Qty 2: **M2-HDSEM-M-08F**  
8' Liberty Reduced Profile HDMI Patching Cables with High Retention
- Qty 2: **M2-HDSEM-M-03F**  
3' Liberty Reduced Profile HDMI Patching Cables with High Retention
- Qty 1: **PPC6BS050BL**  
50' LAN and HDBaseT Solutions Shielded Category 6 pre-made plenum patch cable
- Qty 1: **DL-AR1421**  
DIGITALINX HDMI Adapter Ring
- Qty 1: **DIGI-HD60C-R**  
HDBaseT HDMI Over Twisted Pair Receiver with power and control
- Qty 1: **PS-24D-25**  
Power Supply

## POSSIBLE SUBSTITUTIONS FOR PACKAGE 3

- 1) Add full affordable control with Broaddata LB-ICP controller
- 2) Dual HDMI can be swapped for single HDMI / single DP, or Single HDMI / single VGA
- 3) Wall plate versions of all formats available instead of under table mount
- 4) Add Manual Contact Closure Hard buttons on Panel Crafters plate for Source selection on table
- 5) Substitute Adaptor ring for BYOD Puck

## OPTIONAL ADDITIONS TO THIS ROOM

- 1) Wireless Access Point from Niveo NWA100 or In-wall / in table WAP NWA200
- 2) Need a network Switch? Niveo
- 3) Power products from Niveo




# PACKAGE 4

Medium size conference room or huddle space designed for 4-5 people with HDBaseT & HDMI Mirrored output and integrated scaling. **PART#: RM-PKG-4**



## PACKAGE FEATURES AND BENEFITS:

- 3 HDMI and 2 VGA with audio inputs
- HDBaseT and 1 mirrored HDMI output
- Digital adaptor ring for all of the most popular mobile devices
- Switcher offers analog audio out and in, embed or de-embed audio from the HDMI/VGA inputs
- Switcher is auto-sensing, allowing user to simply connect their device to trigger input change
- Switcher controlled manually or via RS232 from 3rd party control
- HDBaseT signal extension up to 60m between switcher and remote receiver at display
- Mirror HDMI output to second display if needed
- All cables are included (lengths may be modified)

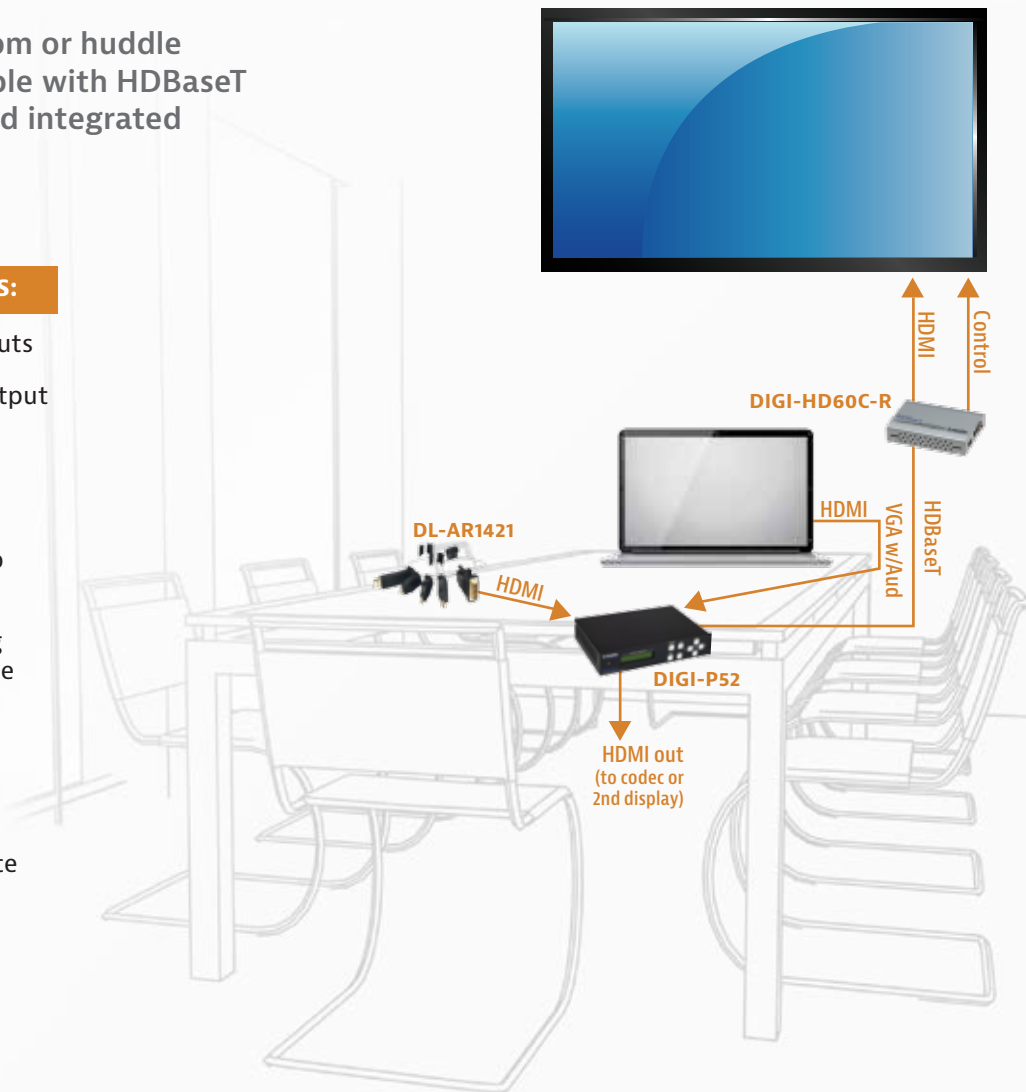

## INCLUDED IN PACKAGE 4

- Qty 2: **E-HDVAM-M-10**  
10' Tabletop HDMI, VGA and Audio hybrid cables
- Qty 1: **M2-HDSEM-M-06F**  
6' Liberty Reduced Profile HDMI Patching Cables with High Retention
- Qty 2: **M2-HDSEM-M-03F**  
3' Liberty Reduced Profile HDMI Patching Cables with High Retention
- Qty 1: **DIGI-P52**  
Presentation Switcher - 5 Input x 2 Output
- Qty 1: **DIGI-HD60C-R**  
HDBaseT HDMI Over Twisted Pair Receiver with power and control
- Qty 1: **DL-AR1421**  
DIGITALINX HDMI Adapter Ring
- Qty 1: **PPC6BS050BL**  
50' manufactured shielded category 6 plenum patch cable for network and HDBaseT solutions

## POSSIBLE SUBSTITUTIONS FOR PACKAGE 4

- 1) If more analog connectivity is needed swap P52 for DIGI-P123
- 2) Swap DIGI-P52 for DIGI-P51 if signal extension is not needed
- 3) Add AUD-220 and speakers if audio is desired

## OPTIONAL ADDITIONS TO THIS ROOM

- 1) Add an affordable networked control system with Broadata part #LB-ICP
- 2) Need a network Switch? Niveo NGSE8H
- 3) Add table box
- 4) Power products from Niveo
- 5) Add AUD-220 Audio amp and Atlas Speakers if needed in the room






# PACKAGE 5

Flexible multi functional multi-technology huddle room / quick meet space with single display/projector and meeting table. Includes human interface control automation.

**PART#: RM-PKG-5**

## PACKAGE FEATURES AND BENEFITS:

- Single HDMI, VGA, and DisplayPort connectivity at table, plus allows for full room control automation with no mandatory User Interface
- Supports control of multiple displays, other controllable electronics, (Biamp, Polycom, etc.) and provide an active response to any enterprise level management software
- The controller also provides remote help desk access for user controls if controller is placed on the network. Multiple Table connection options are available.
- Accommodates both an Extended Table/Wall connection but also allows for a Local Source behind the display to also be connected
- Provides a unique opportunity to automate the environment by using either a local device (PC, Barco Click Share, Wireless Transport, Video Conference Box, and/or any other device) or using the connection on the table

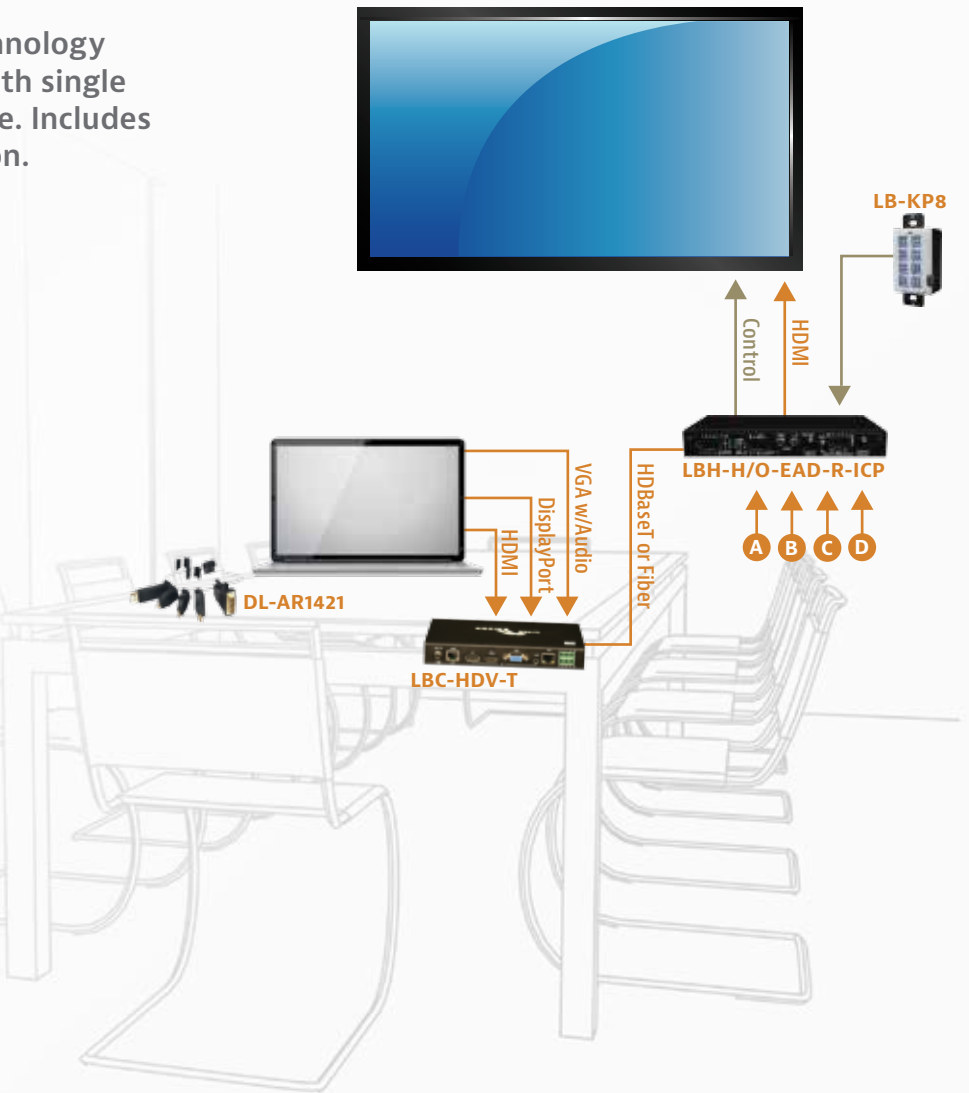

- A** Additional Control Out
- B** HDMI 2nd Source
- C** Alternate Interface / Occupancy Sensor / Contact Closure
- D** Network / Control Network / Web Interface GUI / Management

## INCLUDED IN PACKAGE 5

- Qty 1: **LBH-H/O-EAD-R-ICP**  
Link Bridge HDBaseT 2x1 Switcher Receiver Controller
- Qty 1: **LBC-HDV-T**  
Link Bridge HDMI, VGA, DisplayPort with Audio
- Qty 1: **DL-AR1421**  
DIGITALINX HDMI Adapter Ring
- Qty 3: **M2-HDSEM-08F**  
8' Liberty Reduced Profile HDMI Patching Cables with High Retention
- Qty 1: **E-HDVAM-M-15**  
15' Tabletop HDMI, VGA and Audio hybrid cables

## POSSIBLE SUBSTITUTIONS FOR PACKAGE 5


- 1) Want a wall plate controller integrated keypad? Use LB-KP8E
- 2) Want 2 HDMI, 2 VGA, 1 DisplayPort with all scaled outputs (1920x1200) Switch LBC-HDV-T to LBC-PSW52-HDV
- 3) Want 4 HDMI & 1 VGA with scaling (1920x1200)? Switch LBC-HDV-T to theDL-AS61
- 4) Want a wall plate transmitter? Substitute LBC-HDV-T for LBC-H/V-T-WP

## OPTIONAL ADDITIONS TO THIS ROOM

- 1) Niveo Access-Point NWA200
- 2) Broadata LB-KP8 or LB-KP4  
8 or 4 button keypad
- 3) Broadata LBC-H-T-WP  
(Single HDMI wall plate transmitter)


# PACKAGE 6

Medium to large size conference / presentation room or huddle space with **dual display**. This room is designed to offer 2 displays capable of displaying separate or similar content. **PART#: RM-PKG-6**

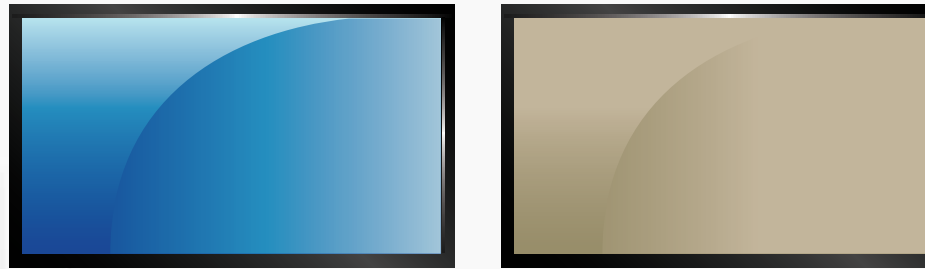

## PACKAGE FEATURES AND BENEFITS:

- Local control including an 8 button keypad, web based control, and automation if desired with very simple configuration
- Connectivity includes up to 4 HDMI inputs, 1 VGA input, and 1 HDBaseT input for distant sources
- Solution will scale all images up to 1080P. It will also be capable of controlling any other devices in the room via RS232
- Includes HDMI HDBaseT transmitter wall plate
- Simple control option such as powering on and connecting a laptop can trigger the system to power on displays, drop shades, or any other action you desire

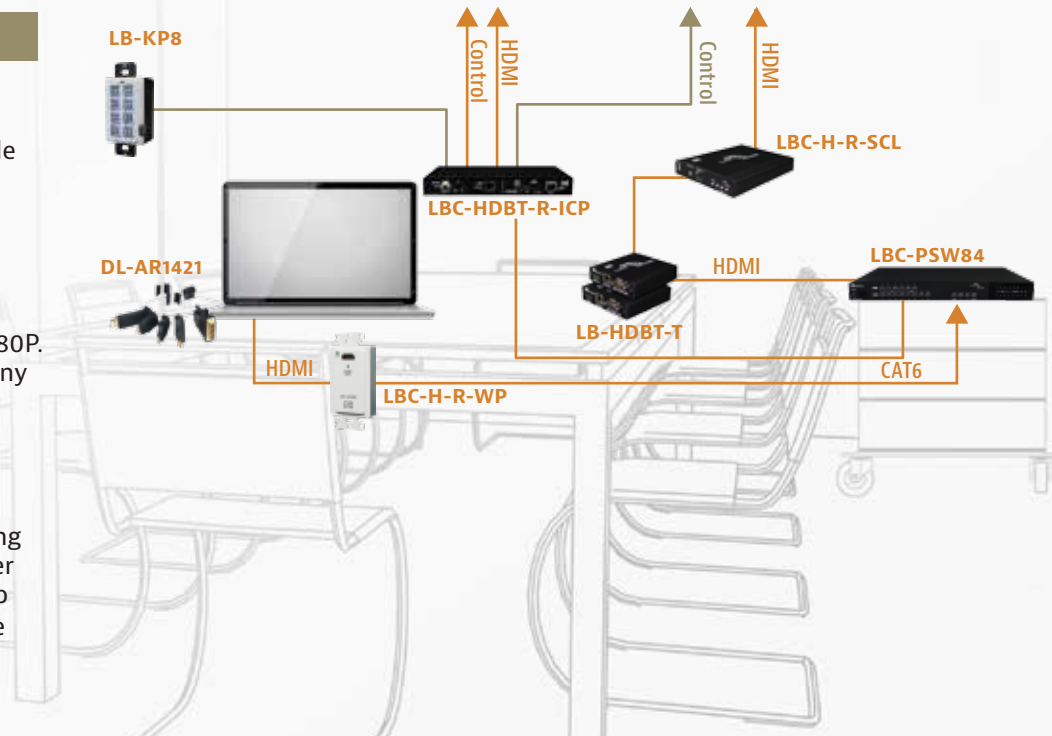

## INCLUDED IN PACKAGE 6

- Qty 1: **LBC-PSW84**  
Link Bridge Presentation Switch, 8 Input (4-HDMI, 2HDBT, 1-VGA, 1-CV), 4 Output (2-HDMI, 1-HDBT, 1-Bypass)
- Qty 1: **LB-HDBT-T**  
Link Bridge Stand-Alone Box HDMI HDBaseT Transmitter
- Qty 1: **LBC-HDBT-R-ICP**  
Link Bridge 5 Play HD-BaseT Receiver w/IR/RS-232/Ethernet and control I/O Ports
- Qty 1: **LBC-H-R-SCL**  
Link Bridge HDMI Video Scaler Receiver, 5-Play with Optical Audio Output , HDBT Cat-5e/6, 2-Way POH
- Qty 1: **LBC-H-R-WP**  
Link Bridge HDMI HDBT Transmitter Wall Plate
- Qty 1: **DL-AR1421**  
DIGITALINX HDMI Adapter Ring
- Qty 1: **LB-KP8**  
Link Bridge Keypad, 8 keys
- Qty 2: **PPC6BS050BL**  
50' LAN and HDBaseT Solutions Shielded Category 6 pre-made plenum patch cable


Add HDMI, RS232, and VGA cables as needed to length

## POSSIBLE SUBSTITUTIONS FOR PACKAGE 6

- 1) Change box version for wall plate
- 2) Make entire system Fiber based for future proofing

# PACKAGE 7

Larger conference room/training room with a conference table in the middle of the room and a lectern/podium in the room. **PART#: RM-PKG-7**

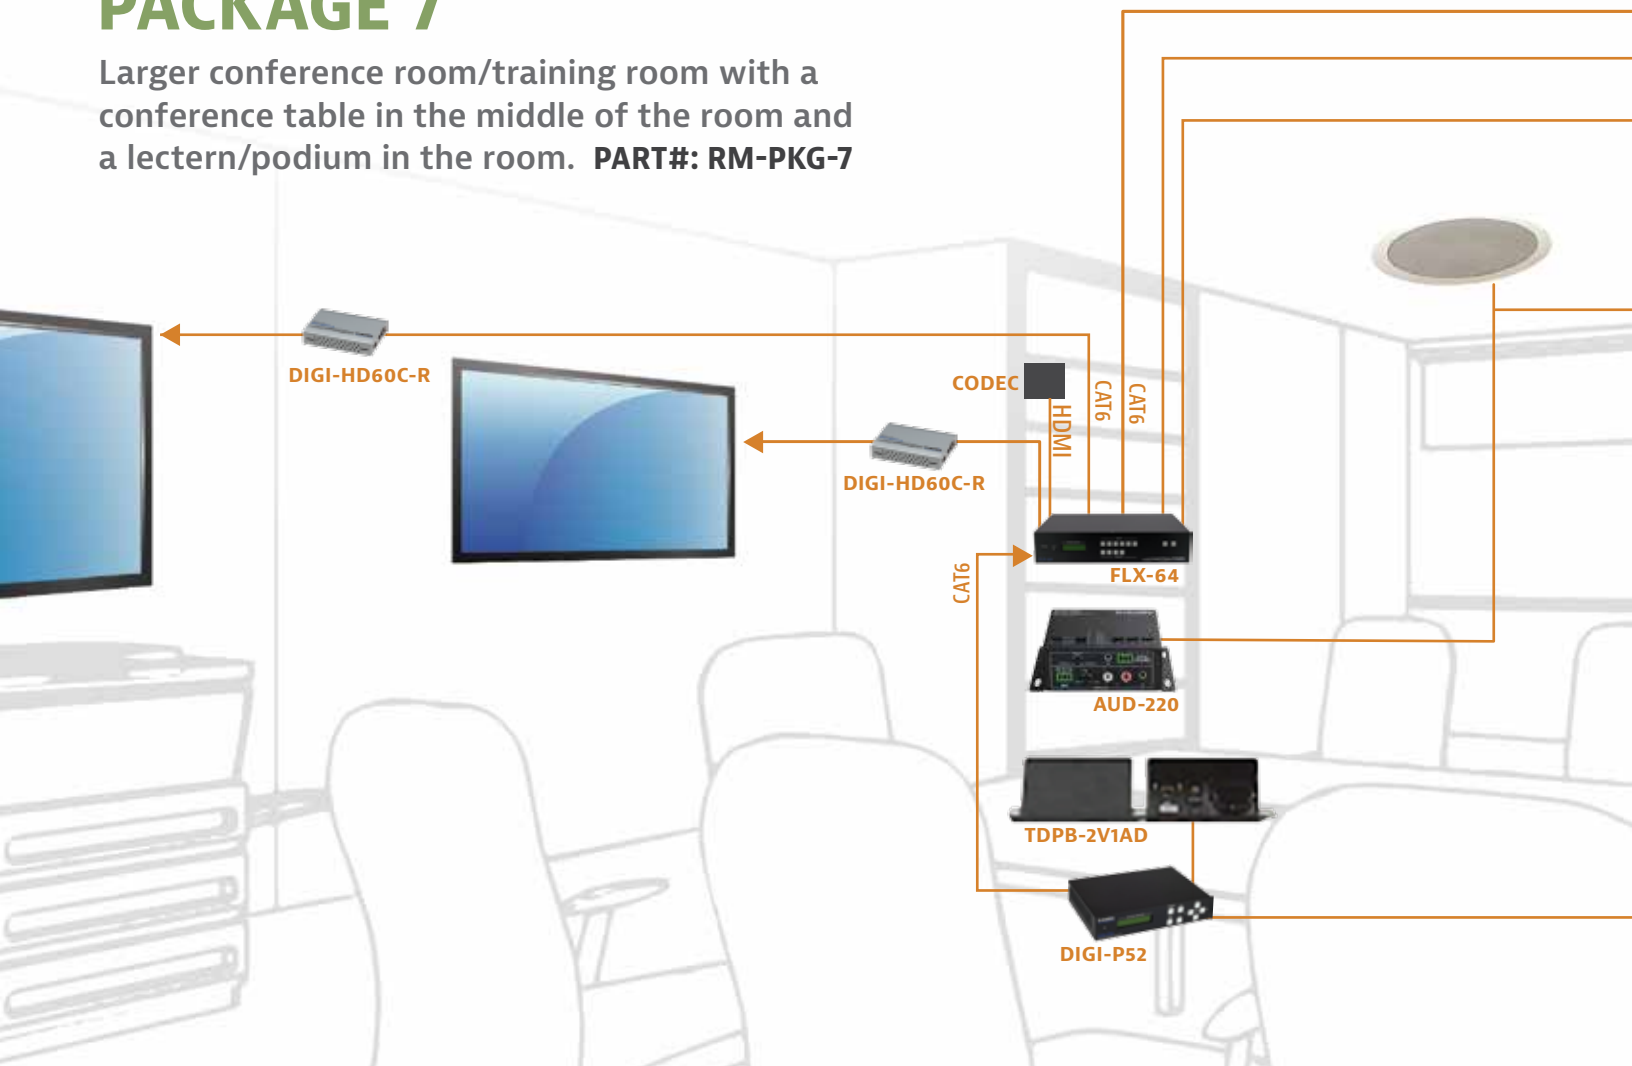


## PACKAGE FEATURES AND BENEFITS:

- Supports up to 4 displays, all of which can show similar or individual sources
- Connectivity for both conference table and separate podium/lectern
- 3 HDMI input and 2 VGA with audio presentation switcher with HDBaseT output for table
- 1 HDMI input and 1 VGA input auto-switcher with HDBaseT output for podium/lectern
- 6x4 HDBaseT matrix switcher for signal extension between table and podium/lectern to up to 4 source devices in possible remote rack location
- 4 remaining HDMI inputs on matrix switch for additional HDMI sources
- All of devices can be controlled via RS232 and the matrix (main) switcher (FLX-64) can be controlled via RS232 or IP control.
- Matrix switcher has an integrated web based control page, and may be controlled from any device with a browser (Ipad, laptop, etc)
- Under table or In-wall Web Access Point
- Includes a small audio amp and a pair of Atlas Sound in ceiling speakers
- Wire & Cable to be added

Wire & Cable to be determined by need and length and can be included in package. Pre-terminated shielded Cat6 available to length



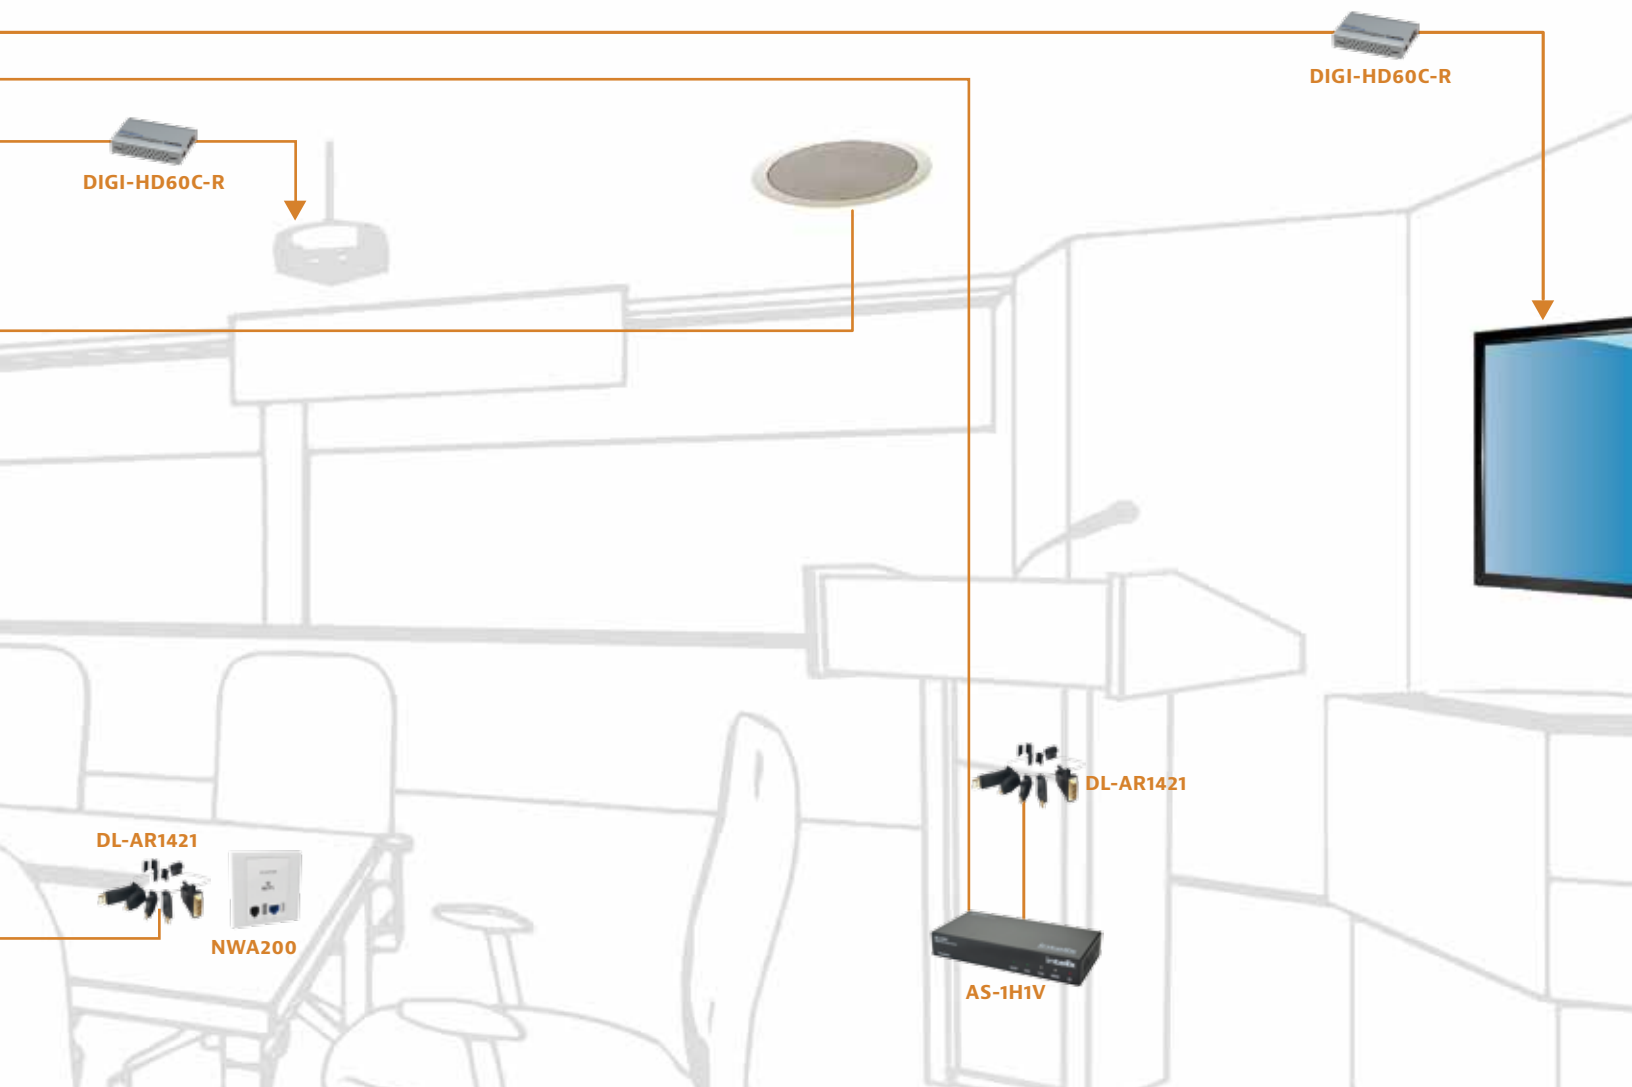


## INCLUDED IN PACKAGE 7

- Qty 1: **DIGI-P52**  
Presentation Switcher - 5 Input x 2 Output
- Qty 1: **AS-1H1V**  
HDMI/VGA Auto-Switcher with HDMI & HDBaseT Output
- Qty 1: **FLX-64**  
6 Input, 4 Output HDMI/HDBaseT Matrix Switcher
- Qty 1: **DL-AR1421**  
DIGITALINX HDMI Adapter Ring, connected to HDMI cable at Lectern and conference table
- Qty 4: **DIGI-HD60C-R**  
HDBaseT HDMI Over Twisted Pair Receiver with power and control
- Qty 1: **NWA200**  
In-wall low profile Fat Access Point
- Qty 1: **AUD-220**  
2 Input Audio Amplifier, 2x20W (4 OHM)
- Qty 2: **FC104 + 51-4 + EZ96-4**  
Atlas Sound In Ceiling Speakers, Enclosure, and Speaker covers
- Qty 1: **TDPB-2V1AD**  
Dual pop-up table box

## POSSIBLE SUBSTITUTIONS FOR PACKAGE 7

- 1) Lectern auto switch can change to DP/ HDMI or HDMI/HDMI if all HDMI or HDMI & Displayport is preferred
- 2) Upgrade lectern from 2x1 to DIGI-P52 for Mic input and more connectivity
- 3) Conference table DIGI-P52 swap for smaller or larger switch
- 4) NWA200 in table/in-wall WAP could be replaced with ceiling mounted NWA100
- 5) Change to 70V amp and add more speakers.

## OPTIONAL ADDITIONS TO THIS ROOM

- 1) Add an affordable networked control system with Broadata part #LB-ICP 
- 2) Rack Power protection from Niveo
- 3) Table box for conference table

# LIBERTY AV'S AUTO & MANUAL SWITCHING SOLUTIONS

## DIGITALINX DL-S41 4 × 1 HDMI AUTO-SWITCHER



The new **DL-S41** is a small format auto-switcher with four HDMI video inputs and one HDMI output. This switcher supports HDMI video resolutions up to 4K (3840 × 2160) at 30 Hz, 1080p 3D and multichannel audio.

### KEY FEATURES

- Auto-switch or manual switch between four HDMI inputs
- One HDMI & one 3.5 mm (ARC & audio de-embedding) output
- Front panel, IR & RS232 control
- UHD, 1080p, 3D compatible; HDCP compliant
- Ultra compact style

## DIGITALINX DL-AS61 6 × 1 HDMI & VGA AUTO-SWITCHER



The **DL-AS61** is a compact multi-format switcher with support for video resolutions up to UHD (3840x2160). When a VGA video signal is connected, the video signal can be scaled up to 1920 × 1200.

### KEY FEATURES

- Four HDMI & two VGA inputs
- One HDMI output with audio de-embedding
- 3D & 4K video support
- Output VGA scaling
- Auto-switching, RS232, IR & front panel control
- Built-in EDID settings

## DIGITALINX DL-AS21C 2 × 1 HDMI & VGA AUTO-SWITCHER



The **DL-AS21C** is a compact multi-format switcher with support for video resolutions up to UHD (4096x2160). Featuring one HDMI input and one VGA input with stereo audio, the DL-AS21C automatically or manually switches either input to a single HDMI output.

### KEY FEATURES

- One HDMI & one VGA input
- One HDMI output
- 3D & 4K video support
- Auto-switching, RS232, IR & front panel control
- Built-in EDID settings
- Built-in CEC controller

## INTELIX AS-1H1DP 2 × 1 HDMI & VGA AUTO-SWITCHER



The **AS-1H1DP** is an under table mounted switcher designed to be the primary PC interface for classrooms, boardrooms & conference centers.

The Intelix **AS-1H1DP-WP** is a two-gang, Decora-style wallplate designed to be the primary PC interface for classrooms, boardrooms and conference centers.

### KEY FEATURES

- One HDMI & one DisplayPort input
- One HDMI & one HDBaseT (60 m) output
- Includes under table mounting ears
- DisplayControl software built-in
- Automatic & manual switching via RS232 & contact closure
- Powered locally or via PoE from the remote HDBaseT receiver
- Up to 4K pass-through on HDMI and DP inputs

## INTELIX AS-1H1V 2 × 1 HDMI & VGA AUTO-SWITCHER



The **AS-1H1V** is an under table mounted switcher designed to be the primary PC interface for classrooms, boardrooms and conference centers. It features VGA + Audio to HDMI conversion and an HDMI input.

The Intelix **AS-1H1V-WP** is a two-gang, Decora-style wallplate designed to be the primary PC interface for classrooms, boardrooms and conference centers.

### KEY FEATURES

- One HDMI & one VGA input
- One HDMI & one HDBaseT (60 m) output
- Includes under table mounting ears
- DisplayControl software built-in
- Automatic & manual switching via RS232 & contact closure
- Powered locally or via PoE from the remote HDBaseT receiver
- Up to 4K pass-through on HDMI input
- VGA scaling up to 1920x1200

## INTELIX AS-2H 2 × 1 DUAL HDMI AUTO-SWITCHER



The **AS-2H** is an under table mounted switcher designed to be the primary PC interface for classrooms, boardrooms & conference centers. It features two HDMI inputs.

The Intelix **AS-2H-WP** is a two-gang, Decora-style wallplate designed to be the primary PC interface for classrooms, boardrooms and conference centers.

### KEY FEATURES

- Two HDMI inputs
- One HDMI & one HDBaseT (60 m) output
- Includes under table mounting ears
- DisplayControl software built-in
- Automatic & manual switching via RS232 & contact closure
- Powered locally or via PoE from the remote HDBaseT receiver
- Up to 4K pass-through on both HDMI inputs

# Huddle Room Flexibility & Convenience

## DIGI-P52 PRESENTATION SWITCHER - 5 INPUT x 2 OUTPUT



The Intelix **DIGI-P52** allows the integration of multiple analog and digital devices into a high-definition environment. Mounting options include wall, under table, or resting on a shelf.

• DIGI-P51 also available. (HDMI only)

### KEY FEATURES

- Three HDMI & two universal analog (VGA, YPbPr, CVideo) inputs
- Simultaneous HDBaseT & HDMI outputs
- Auto switch inputs when universal inputs are set to VGA
- Mic & Line level mixing with phantom power
- Line level audio de-embedding
- Analog audio embedding on each input channel
- Output scaling to 7 fixed resolutions
- Front panel, IR & RS232 control
- CEC enabled for source control
- RS232 passthrough for control of display

## DIGI-P123 PRESENTATION SWITCHER - 12 INPUT x 3 OUTPUT



The Intelix **DIGI-P123** allows selection of twelve different sources, and will simultaneously scale the selected video to HDMI, VGA, and HDBaseT outputs. The unit features four HDCP compliant HDMI inputs, four VGA inputs, and four analog video inputs.

• DIGI-P122 also available. (HDMI only)

### KEY FEATURES

- Four HDMI, four VGA, one S-video, two composite video & one component video input
- Simultaneous HDBaseT, HDMI & VGA outputs, except for encrypted content
- Mic & Line level mixing plus audio de-embedding
- Integrated stereo amplifier & analog line level output
- Output scaling to [5] fixed resolutions (XGA, WXGA, 720p, 1080p, 1360 x 768)
- Front panel, IR, TCP/IP & RS232 control
- On-screen menuing

## FLX-64 6 INPUT, 4 OUTPUT HDMI/HDBASET MATRIX SWITCHER



The Intelix **FLX-64** was designed for use in conference rooms that have two in-room inputs extended to the rack, a few local sources at the rack, two discrete displays, a VTC codec, and a recorder.

### KEY FEATURES

- 4 HDMI inputs (2 w/ audio embedding) and 2 HDBaseT Lite inputs w/ PoE
- 4 HDBaseT Lite outputs w/ PoE & 2 mirrored HDMI outputs
- 60 m (200 ft) maximum extender distance
- Audio de-embedding on each output, including breakaway
- Front panel, IR, TCP/IP, and RS232 control
- IR and RS232 routing
- IR and RS232 tunneling over HDBaseT (inputs and outputs)
- Control page and configuration accessible from web browser
- Advanced HDCP management

## LBC-PSW84 PRESENTATION SWITCH, 8 INPUT, 4 OUTPUT



- 8 Input Channels, 4 HDMI, 2 HDBT, VGA, Composite Video
- 3 simultaneous video outputs 1 HDBT, 2 HDMI
- True Matrixed 2nd HDMI output
- All inputs and outputs feature L/R audio except HDBT
- Supports HDCP, DDC/EDID

## LBC-PSW52 PRESENTATION SWITCH, 5 INPUT, 2 OUTPUT



- 3 digital inputs / 2HDMI 1 Display Port
- 2 VGA input
- 1 HDBaseT Output with 1 HDMI output
- Scaler
- Auto switching
- Analog audio output

## AUD-220 2 INPUT AUDIO AMPLIFIER, 2X20W (4 OHM)



- Two analog audio inputs
- Microphone input with ducking or mixing
- Bass, treble adjustments
- Line input and/or microphone muting
- Stereo, 2x mono, or bridged mono speaker output
- Line level loop output to daisy chain
- Front panel and optional IR control

## BROADATA CONTROL



**LB-KP8**  
LINK BRIDGE  
KEYPAD,  
8 KEYS



**LB-ICP**  
LINK BRIDGE INLINE CONTROL  
PROCESSOR, TWO RS232, TWO  
RELAY, TWO GPIO, ONE IR,  
ONE 10/100 ETHERNET

## AUD-340 3 INPUT AUDIO 70/100V AMPLIFIER, 40W



- Two analog audio inputs; one digital audio input
- Microphone input with ducking or mixing
- Bass, treble adjustments
- Line input and/or microphone muting
- 70V or 100V output

## NETWORK ACCESSORIES BY NIVEO

ROUTERS, WIRELESS ACCESS POINTS, MANAGED & UNMANAGED SWITCHES (WITH & WITHOUT POE)



# HUDDLE SPACE & CONFERENCE ROOM ACCESSORIES

## M2-HDSEM-M SERIES M2 HIGH SPEED HDMI WITH ETHERNET



- 30 AWG copper TMDS pairs
- Super low profile molded heads
- High retention plugs up to 12 lbs
- Available in 1,2,3,4,5,6,8,10,12 & 15ft

## E2-HDSEM-M SERIES E2 HIGH SPEED HDMI WITH ETHERNET



- 28 & 26 AWG TMDS pairs
- Low profile molded head
- High retention plugs up to 12 lbs
- Lengths from ½ to 20m

## DL-AR UNIVERSAL HDMI ADAPTER RING COMPLETE ASSEMBLY WITH 5 ADAPTERS



- Security loop with faux ferrite and 4 adapters to HDMI
- DisplayPort Plug (Male) to HDMI Jack (Female)
- Mini DisplayPort Plug (Male) to HDMI Jack (Female)
- Mini HDMI (C) Plug (Male) to HDMI Jack (Female)

## E-HDVAM-M TABLETOP HDMI, VGA AND AUDIO HYBRID CABLES



- Digital HDMI and Analog VGA plus Audio in one cable
- 28 AWG HDMI for superior bandwidth and headroom
- 32 AWG coaxial VGA for WUXGA to 19 feet
- Available in 6, 10, 15 and 19ft

## E-DPM-M DISPLAYPORT CABLES COMMERCIAL GRADE



- 28 AWG cabling
- 3, 6, 10 & 15 ft. lengths
- Supports audio and HDCP
- Thumb activated locking
- Supports resolutions to 3840 x 2160 at 3 & 6ft
- Supports resolutions to 2560 x 1600 at 10 & 15ft

## E-DPM-HDM DISPLAYPORT TO HDMI CABLES COMMERCIAL GRADE



- 28 AWG cabling
- 3, 6, 10 & 15 ft. lengths
- Supports audio and HDCP
- Thumb activated locking
- Supports resolutions to 3840 x 2160 at 3 & 6ft
- Supports resolutions to 2560 x 1600 at 10 & 15ft

## PC6BS SHIELDED CATEGORY 6 PATCH CABLE



- Category 6 F/UTP shielded stranded patch cable
- 8P8C modular RJ45 plugs with gold flash plated contacts
- Strain relief boots as required by 568 standard

## PC6ABS SHIELDED CATEGORY 6A PATCH CABLE



- Category 6 F/UTP shielded stranded patch cable
- 8P8C modular RJ45 plugs with gold flash plated contacts
- Strain relief boots as required by 568 standard

## PPC6BS AND PPC6ABS PLENUM PRE-TERMINATE CAT6 AND 6A PATCH CABLES



- Category 6 F/UTP shielded solid plenum rated cable
- 8P8C modular RJ45 plugs with gold flash plated contacts
- Strain relief boots as required by 568 standard

- Tested to ANSI/TIA-568C Cat6 on Fluke DTX-1800
- NEC CMP, CEC CMP FT6, RoHS compliant
- Standard lengths: 35,50,75,100,150,200,250 and 300 feet
- Custom lengths available upon request

## 24-4P-P-L6SH SHIELDED F/UTP CATEGORY 6 – PLENUM



- Solid annealed bare copper conductors
- HDPE or FEP insulation
- Tightly twisted & unshielded
- CMR or CMP rated, RoHS compliant
- Cool Spool Reels
- ANSI/TIA-568C Verified Cat 6
- Positive ACR to 550 MHz
- 3 colors

## TABLE BOXES

### TRB-2V1AD



- Smooth pneumatic lift
- Pass-through cable whips
- HDMI, VGA, stereo audio & ethernet inputs

### TDPB-2V1AD



- Easy installation
- Local power input

## POWER PRODUCTS BY NIVEO AND TRIPPLITE



PDU's, Surge Protection, UPS's and pure sign wave combination units available.