



DIGITALINX
VALUE-ENGINEERED DIGITAL SOLUTIONS

DL-44E-KIT Series Firmware Update Instructions Version 1.0.6

For Technical Support please call our toll free number at 800-530-8998 or email us at
supportlibav@libav.com

About the Update

Firmware Version: 1.0.6

What does the firmware update do?

Updates the DL-44E-KIT's API.

Note: The updated API for this product is located online under the DOCS tab on the DL-44E-KIT product page online at www.libav.com

How long will this take?

The update will take approximately 2-3 minutes to complete.

What you will need

- PC computer to conduct the update
- DL-44E-KIT 1.0.6 Firmware update file
- USB A (F) to Micro D USB cable






Before you begin update make sure the firmware zip file and any zip file in the firmware package has been unzipped.

Update Instructions

STEP 1: Unzip the firmware folder you have downloaded from the DL-44E-KIT product page

STEP 2: Unzip the folder labeled *DL-44E-KIT 1.0.6 UPDATE FILE* contained in the firmware package

Name	Date modified	Type	Size
 DL-44E-KIT 1.0.6 UPDATE FILE.zip	5/28/2019 8:48 PM	Compressed (zipp...	98 KB
 DL-44E-KIT Firmware instructions.docx	5/28/2019 8:45 PM	Microsoft Word D...	2,258 KB
 Updata_v1.4.1.exe	3/3/2016 2:40 PM	Application	1,702 KB




STEP 3: Connect the Micro D side of a USB cable to the port labeled FW on the front of the DL-44E-KIT




STEP 4: Connect the USB A side of the USB cable to a PC computer. This will open up a COM port on your computer, be sure that the COM port number is 9 or below.




STEP 5: Find the executable program labeled **UPDATA 1.41** in the firmware package, double click on the .exe file to start the program.

Name	Date modified	Type	Size
 DL-44E-KIT 1.0.6 UPDATE FILE.zip	5/28/2019 8:48 PM	Compressed (zipp...	98 KB
 DL-44E-KIT Firmware instructions.docx	5/28/2019 8:45 PM	Microsoft Word D...	2,258 KB
 Updata_v1.4.1.exe	3/3/2016 2:40 PM	Application	1,702 KB


STEP 6: Click the *CONNECT USB* option once the software initiates, be sure that the power to the DL-44E-KIT is ON.

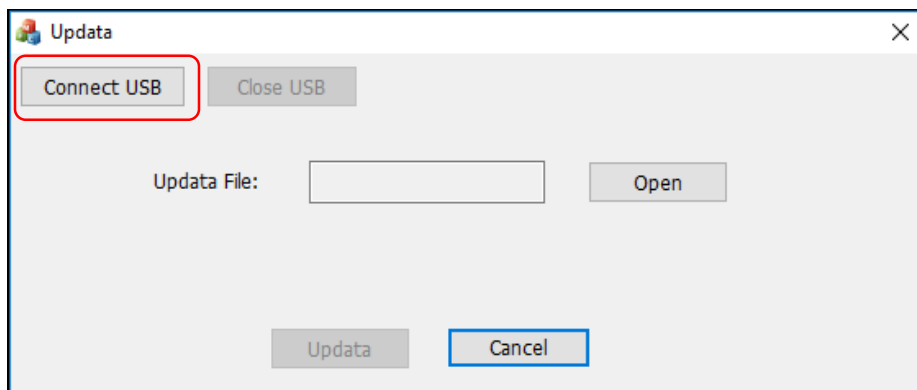

STEP 7: Once you are successfully connected to the DL-44E-KIT, click *OPEN* to locate the firmware file labeled ***DL-44E-KIT 1.0.6 UPDATE FILE***

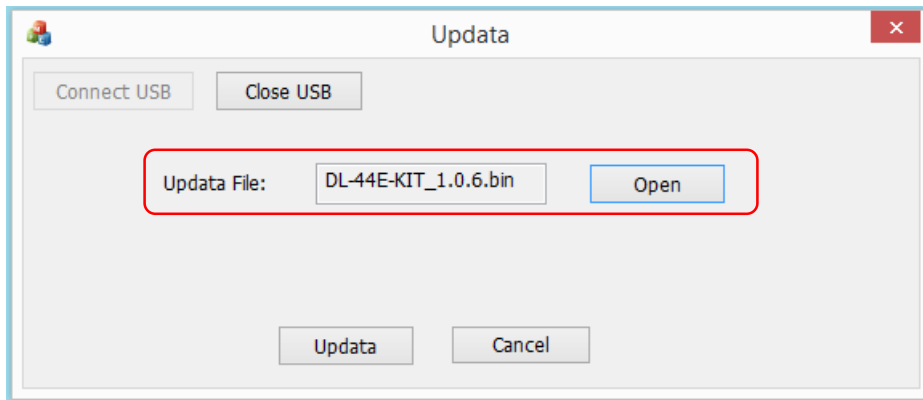

STEP 8: Click *UPDATA* to begin the update after you have selected the update file.

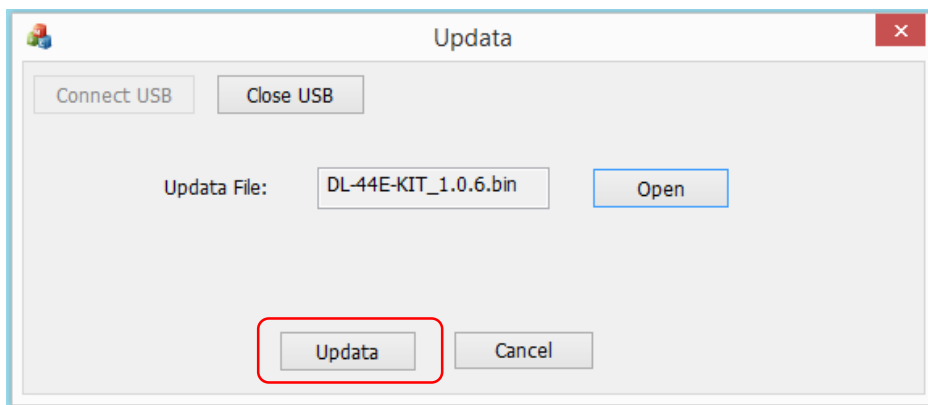

STEP 9: Once the update is complete a ***success*** message will pop up. Reboot the switch the update is now complete.

